


Notes:

1. Bond all concentric neutrals together.
2. Provide sufficient primary neutral pigtail and cable slack to permit ready disconnection of elbow and mounting on parking stand.

Spades provided with Transformer  
 45-225 KVA      6 HOLE SPADES  
 300-500 KVA    8 HOLE SPADES  
 750-1000 KVA   12 HOLE SPADES  
 ABOVE 1500 KVA 16 HOLE SPADES

See Units  
 UJ6-3, UJ6-4,  
 and UJ6-8

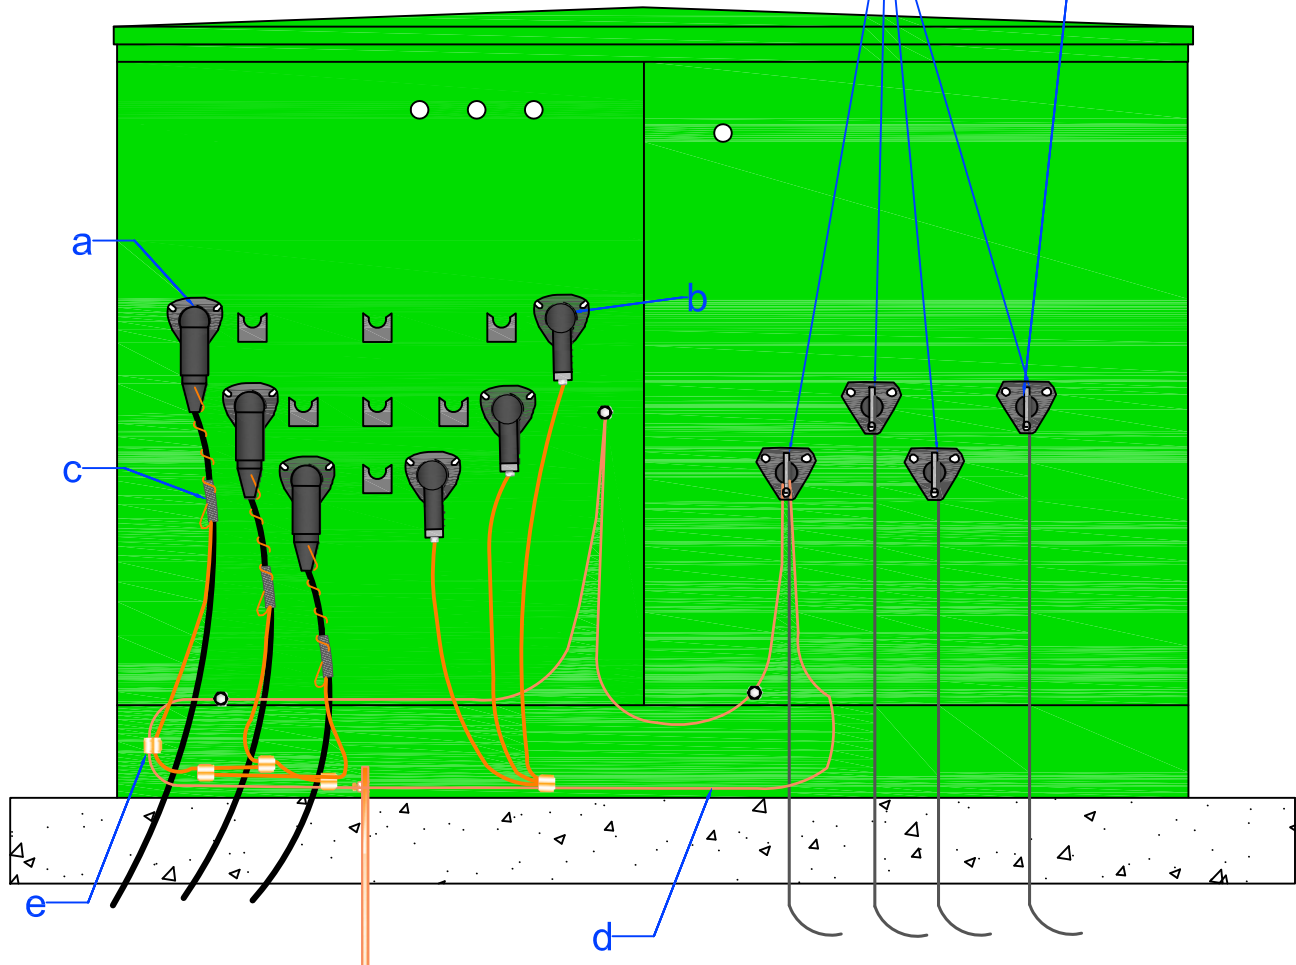

Item	Compatible Unit	Quantity	Compatible Unit Description
a	VUM3-1	3	25KV Prmy Cable Terminal
b	VUM5-9	3	Arrester Elbow 18KV URD
c	N/A	*3	2000558 - Kit Cable Sealing 1/0
d	N/A	As Req'd	2001293 - Wire Copper Bare #2 7 Str
e	N/A	As Req'd	Connectors

\* Denotes "Grab bag" items.



URD CONSTRUCTION  
 SPECIFICATIONS

3Ø Padmount Transformer  
 Deadend

drawn: JBS	approved MJB	date: July 17, 2013
---------------	-----------------	------------------------

103-001-0713